

GLOBE VALVE


Bolted Bonnet, Rising Stem
Flange ends EN 1092-1

Gland Packing Globe valve Tmax 350°C at 1.12MPa, Pmax 1.6MPa at 120°C



Fig. 301CF
(1.0619)

Fig. 301TF
(1.4581)

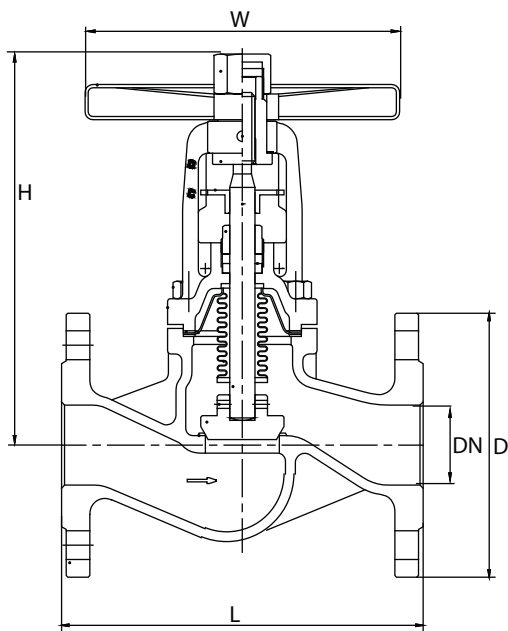

Parts	Material	
Body	1.0619	1.4581
Seat ring	1.0619 + 13Cr	1.4581
Disc	1.0561 + 13Cr	1.4581
Pin	S.S 304	S.S 316
Stem	1.4021	1.4401
Bellows	S.S 304	S.S316
Sealing	S.S 304	S.S 316
Gasket	S.S + Graphite (Option PTFE)	
Bonnet	1.0619	1.4581
Bolt	A193-B7	A2-70
Packing	Graphite (Option PTFE)	
Gland	1.0561	1.4581
Handwheel	1.0402	
Lock Nut	1.0561	

Design: EN 12516

Face to Face: EN 558

Flange ends: EN1092-1 PN16

Inspection & Testing: EN 12266

Pressure Working: PN16

Temperature: -20 ~ +425°C

Application: Steam, Hot Oil, Gas...

Warranty: 24 Months

Dimensions

mm

DN	15	20	25	32	40	50	65	80	100	125	150	200
D	95	105	115	140	150	165	185	200	220	250	285	340
L	130	150	160	180	200	230	290	310	350	400	480	600
H	196	196	205	205	222	224	240	265	350	380	410	550
W	120	140	140	140	160	160	180	200	250	250	350	450